


Application Note OSM01

OSM Implementation Guide

Version 004/04.2025



**Elektronik
Systeme**

© F&S Elektronik Systeme GmbH
Untere Waldplätze 23
D-70569 Stuttgart

www.fs-net.de

Phone: +49(0)711-123722-0

About This Document

When integrating an *Open Standard Module™* (OSM), defined by the *Standardization Group for Embedded Technology e. V.* (SGeT), several special topics are to be considered. The intention of this document is to give all necessary information for the implementation. The document focuses on the general requirements of the F&S Modules. The latest version of this document can be found at: www.fs-net.de.

ESD Requirements



All F&S hardware products are electrostatic discharge (ESD) sensitive. All products are handled and packaged according to ESD guidelines. Please do not handle or store ESD sensitive material in ESD unsafe environments. Negligent handling will harm the product and warranty claims become void.

Review Service

F&S provide a schematic review service for your baseboard implementation. Please send your schematic as searchable PDF to support@fs-net.de.

History

Version/Date	Platform	Added (A) Removed (R) Modified (M)	Chapter	Description	Author
001/08.2024	All	A	All	Initial Version	UK
002/11.2024	-	M	All	Drawing of the shipping tray added, minor adaptions	UK
003/04.2025	-	M	3.1	Drawing of the shipping tray corrected	UK
004/04.2025	-	A, M, R	All	New design template, major adaptions	UK

Table of Content

1	Overview	6
1.1	Additional Documentation.....	6
1.2	Design Data	6
2	Design Process	7
2.1	Mechanical Information.....	7
2.1.1	Dimensions.....	7
2.1.2	Contact Characteristics	7
2.1.3	Cooling.....	7
2.2	Contact Grid Signal Description	8
2.2.1	Conventions	8
2.2.2	Power & GND	8
2.2.3	System Control	9
2.2.4	MISC	9
2.2.5	JTAG.....	10
2.2.6	UART.....	10
2.2.7	Ethernet	10
2.2.8	GPIO.....	12
2.2.9	SDIO.....	12
2.2.10	PWM.....	13
2.2.11	Analog Signals	13
2.2.12	SPI.....	13
2.2.13	I2S.....	14
2.2.14	CAN.....	14
2.2.15	USB	14
2.2.16	I2C.....	15
2.2.17	PCIe.....	15
2.2.18	MIPI CSI	15
2.2.19	Display	16
3	Handling	18
3.1	Packaging	18
3.2	Identification	19
3.2.1	Matrix Code Sticker.....	19
3.2.2	PCB Information	19
3.3	Production.....	19
3.3.1	Orientation Mark for Placement	19
3.3.2	Soldering Profile.....	20
4	Appendix	21
4.1	Second source rules.....	21
4.2	RoHS and REACH statement.....	21
4.3	Important Notice.....	21
5	Warranty Terms	22
5.1	Hardware Warranties	22
5.2	Software Warranties.....	22



5.3	Disclaimer of Warranty	22
5.4	Limitation on Liability.....	22



Tables

Table 1: Contact Types (I/O)	8
Table 2: Buffer Types	8
Table 3: OSM size-S (PWR & GND pins).....	9
Table 4: OSM size-S (SYS CRTL pins)	9
Table 5: OSM size-S (MISC pins)	9
Table 6: OSM size-S (JTAG pins).....	10
Table 7: OSM size-S (UART pins).....	10
Table 8: OSM size-S (Ethernet pins)	11
Table 9: OSM size-S (GPIO pins)	12
Table 10: OSM size-S (SDIO pins).....	13
Table 11: OSM size-S (PWM pins).....	13
Table 12: OSM size-S (ADC pins).....	13
Table 13: OSM size-S (SPI pins).....	13
Table 14: OSM size-S (I2S pins).....	14
Table 15: OSM size-S (CAN pins).....	14
Table 16: OSM size-S (USB pins)	15
Table 17: OSM size-S (I2C pins)	15
Table 18: OSM size-S (PCIe pins)	15
Table 19: OSM size-S (MIPI CSI pins)	16
Table 20: OSM size-S (DISP pins)	17

Figures

Figure 1: OSM Size-S (dimensions)	7
Figure 2: LGA example	7
Figure 3: FTGA example	7
Figure 4: Shipping Tray	18
Figure 5: Matrix Code Sticker (example)	19
Figure 6: F&S OSM Size-S (pcb information, BOT view).....	19
Figure 7: F&S OSM Size-S (F&S logo as orientation mark, TOP view through the board).....	19
Figure 8: Soldering Profile (Vapor phase, example).....	20

1 Overview

1.1 Additional Documentation

F&S highly recommends reading the following documents besides the implementation process:

- OSM HW Specification V1.2 (as of 08/11/2024, available at <https://sget.org>, login required)
- OSM Design Guide 1.0 (as of 04/05/2022, available at <https://sget.org>, login required)¹

¹ Contains a step-by-step implementation description with circuit examples.

1.2 Design Data

F&S provides a set of OSM design data (Altium & Cadence), including

- schematic symbols (general & module-specific implementation information),
- footprints (including position references & footprints for the spacers of the F&S heat spreader),
- 3D models of the modules,

to ease the implementation. The design data (including schematics) of a suitable carrier board are also available and may be used as reference. The latest versions of the design data can be downloaded from www.fs-net.de.




2 Design Process

2.1 Mechanical Information

2.1.1 Dimensions

All F&S modules are assembled on one side. Neither a PCB-spacer nor a cut-out on the carrier board is required. All modules are Standard Height F - "Flat" modules according to the specification.

Due to the production process, all F&S modules have a small overhang at the corners which must be considered.

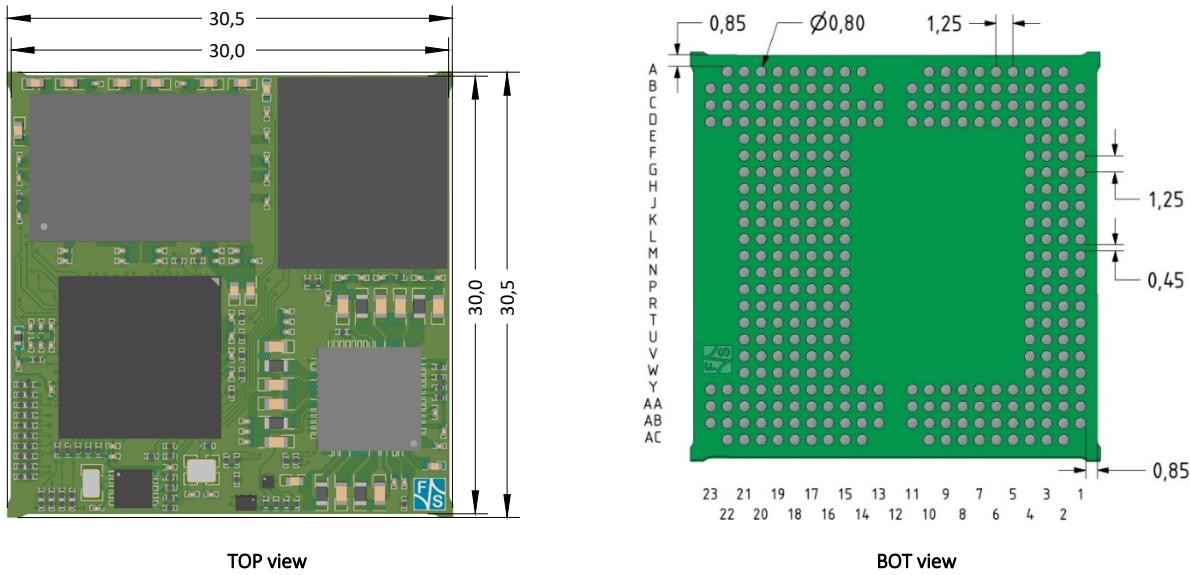

Note: All dimensions are in mm.

Figure 1: OSM Size-S (dimensions)

2.1.2 Contact Characteristics

By default, the contact type is an Electroless Nickel Immersion Gold Land Grid Array (ENIG LGA). Fused Tin Grid Array (FTGA) finish is optionally available.



Figure 2: LGA example

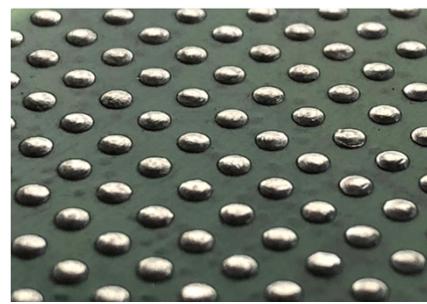


Figure 3: FTGA example

2.1.3 Cooling

As basis for a cooling concept, F&S offers a heat spreader. Part number is **MHS.OSM.1**, including:

- 1x heat spreader plate
- 1x thermal interface material (TIM)
- 4x M2.5x6mm DIN965

For more information, see document "OSM Cooling Solution". The latest version can be found at: www.fs-net.de.

2.2 Contact Grid Signal Description

The following tables show the complete general contact grid signal description for OSM size-S modules according to the OSM HW Specification V.1.2 with a focus on F&S modules.

2.2.1 Conventions

Contact Type	Description
I	input to the module
O	output from the module
I/O	bi-directional input / output signal
OD	open drain output
I OD	input to the module, where an OD output on the carrier is expected
n.c.	not connected on any F&S module

Table 1: Contact Types (I/O)

Contact Type	Description
P	power to the module
PO	power source from the module
analog	analog signal between defined voltage
CMOS	Logic input or output
USB	USB compatible differential signal
USB SS	USB SuperSpeed compatible differential signal
MIPI CSI	MIPI CSI differential signal (D-PHY or M-PHY)
MIPI DSI	MIPI DSI differential signal (D-PHY)
PCIe	PCI Express compatible differential signal
LVDS	Low Voltage Differential Signal for connecting an LCD

Table 2: Buffer Types

2.2.2 Power & GND

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
M19	VCC_2_TEST ¹	PO	1.8 V		1.8 V for testing purposes max. current: 50 mA
Y16	VCC_3_TEST	PO			PWR testpoint, n.u. on most F&S modules
Y20	VCC_4_TEST	PO	3.3 V		3.3 V supply for carrier peripherals max. current: 200 mA
Y3	VCC_5_TEST				n.c.
C5	VCC_6_TEST				n.c.
Y8, Y9, Y10, Y11, Y17,	VCC_IN_5V	P	5.0 V		main power supply input
Y19	VCC_IN_3V3				n.c.
AA18, AB18	V_BAT				n.c.
U18	VCC_OUT_IO	PO	1.8 V		general I/O reference voltage max. current: 100 mA
M17	ETH_IOPWR	PO	1.8 V / 2.5 V / 3.3 V		Ethernet I/O reference voltage max. current: 100 mA
C20	SDIO_A_IOPWR	PO	1.8 V / 3.3 V		SDIO_A I/O reference voltage max. current: 100 mA
T20	SDIO_B_IOPWR	PO	1.8 V / 3.3 V		SDIO_B I/O reference voltage max. current: 100 mA



Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
W17	RTC_PWR	P	3.0 V		RTC supply input
A4, A7, A10, B2, B5, B8, B9, C11, D1, D5, D8, D18, E2, E15, E21, F16, F20, H2, H4, J16, J20, L2, L4, L18, M16, M20, P2, P4, P18, R1, R16, R20, U2, U4, V1, V16, V20, W3, Y2, Y18, AA1, AA4, AA7, AA8, AA10, AA11, AA14, AA17, AA19, AA22, AB3, AB6, AB9, AB15, AB21, AC4, AC7, AC10			GND		

Table 3: OSM size-S (PWR & GND pins)

¹ VCC_1_TEST was only used in OSM specification V1.0 only and is no longer available since specification V1.1.

2.2.3 System Control

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
V17	CARRIER_PWR_EN	O CMOS	1.8 V		enables power for peripherals on carrier
Y13	CARRIER_STBY#	O CMOS	1.8 V		LOW: module is in standby power state
U17	RESET_IN#	I OD CMOS	1.8 V	PU 10k	LOW: resets module FLOAT: otherwise
Y14	RESET_OUT#	O CMOS	1.8 V		LOW: CPU resets peripherals on carrier
AA9	PWR_BTN#	I OD CMOS	1.8 V ... 5.0 V	PU 10k	LOW: behavior depends on configuration FLOAT: in-active state
U19	BOOT_SEL0#				n.c.
R18	BOOT_SEL1#				n.c.
T17	FORCE_RECOVERY#	I OD CMOS	1.8 V	PU 10k	

Table 4: OSM size-S (SYS CRTL pins)

2.2.4 MISC

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
N2, AA2, AA13	RESERVED				n.c.
B22, C16, D6, D7, P16	Vendor Defined				n.c. on most F&S modules
A15, A16, A17, A18, A19, A20, A21, B15, B16, B17, B18, B19, B20, B21, C15, C17, C19, C21	COM_AREA				n.c.

Table 5: OSM size-S (MISC pins)

2.2.5 JTAG

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
N17	JTAG_TCK(SWCLK)	I CMOS	1.8 V		test clock
N19	JTAG_TMS(SWDIO)	I CMOS	1.8 V		test mode selection
P17	JTAG_TDI	I CMOS	1.8 V		test data input
P19	JTAG_RTCK	O CMOS	1.8 V		returned test clock
R17	JTAG_TDO(SWO)	O CMOS	1.8 V		test data output
R19	JTAG_nTRST	I CMOS	1.8 V		test reset, active LOW
AC18	DEBUG_EN	I CMOS	1.8 V		enables JTAG function
C18	TEST_GENERIC	I/O CMOS	1.8 V		n.c. on most F&S modules

Table 6: OSM size-S (JTAG pins)

2.2.6 UART

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
A14	UART_A_RX	I CMOS	1.8 V		serial data input port A
B13	UART_A_TX	O CMOS	1.8 V		serial data output port A
C13	UART_A_RTS	O CMOS	1.8 V		“Request to Send” handshake port A
C14	UART_A_CTS	I CMOS	1.8 V		“Clear to Send” handshake port A
D14	UART_B_RX	I CMOS	1.8 V		serial data input port B
D13	UART_B_TX	O CMOS	1.8 V		serial data output port B
D15	UART_B_RTS	O CMOS	1.8 V		“Request to Send” handshake port B
D16	UART_B_CTS	I CMOS	1.8 V		“Clear to Send” handshake port B
A22	UART_C_RX	I CMOS	1.8 V		serial data input port C
B23	UART_C_TX	O CMOS	1.8 V		serial data output port C
C22	UART_D_RX	I CMOS	1.8 V		serial data input port D
C23	UART_D_TX	O CMOS	1.8 V		serial data output port D
D22	UART_CON_RX	I CMOS	1.8 V		serial data input console port
D23	UART_CON_TX	O CMOS	1.8 V		serial data output console port

Table 7: OSM size-S (UART pins)

2.2.7 Ethernet

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
E16	ETH_A_RGMII_CRS				n.c.
F15	ETH_A_RGMII_COL				n.c.
H15	ETH_A_RGMII_TXD0	O CMOS	1.8 V / 2.5 V / 3.3 V		transmit data bit 0 port A
G15	ETH_A_RGMII_TXD1	O CMOS	1.8 V / 2.5 V / 3.3 V		transmit data bit 1 port A
H16	ETH_A_RGMII_TXD2	O CMOS	1.8 V / 2.5 V / 3.3 V		transmit data bit 2 port A
G16	ETH_A_RGMII_TXD3	O CMOS	1.8 V / 2.5 V / 3.3 V		transmit data bit 3 port A
K16	ETH_A_RGMII_TX_EN(_ER)	O CMOS	1.8 V / 2.5 V / 3.3 V		Transmit enable (error) port A
J15	ETH_A_RGMII_TX_CLK	I/O CMOS	1.8 V / 2.5 V / 3.3 V		transmit clock port A
K15	ETH_A_RGMII_RXD0	I CMOS	1.8 V / 2.5 V / 3.3 V		receive data bit 0 port A

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
L15	ETH_A_RGMII_RXD1	I CMOS	1.8 V / 2.5 V / 3.3 V		receive data bit 1 port A
N15	ETH_A_RGMII_RXD2	I CMOS	1.8 V / 2.5 V / 3.3 V		receive data bit 2 port A
P15	ETH_A_RGMII_RXD3	I CMOS	1.8 V / 2.5 V / 3.3 V		receive data bit 3 port A
L16	ETH_A_RGMII_RX_ER				n.c.
M15	ETH_A_RGMII_RX_DV(_ER)	I CMOS	1.8 V / 2.5 V / 3.3 V		receive data valid port A
R15	ETH_A_RGMII_RX_CLK	I/O CMOS	1.8 V / 2.5 V / 3.3 V		receive clock port A
N16	ETH_A_SDP				n.c.
T15	ETH_A_MDIO ¹	I/O CMOS	1.8 V / 2.5 V / 3.3 V		ETH management bus data signal port A
T16	ETH_A_MDC ¹	O CMOS	1.8 V / 2.5 V / 3.3 V		ETH management bus clock signal port A
D2	ETH_B_RGMII_CRS				n.c.
E1	ETH_B_RGMII_COL				n.c.
G1	ETH_B_RGMII_TXDO	O CMOS	1.8 V / 2.5 V / 3.3 V		transmit data bit 0 port B
F1	ETH_B_RGMII_TXD1	O CMOS	1.8 V / 2.5 V / 3.3 V		transmit data bit 1 port B
G2	ETH_B_RGMII_TXD2	O CMOS	1.8 V / 2.5 V / 3.3 V		transmit data bit 2 port B
F2	ETH_B_RGMII_TXD3	O CMOS	1.8 V / 2.5 V / 3.3 V		transmit data bit 3 port B
J2	ETH_B_RGMII_TX_EN(_ER)	O CMOS	1.8 V / 2.5 V / 3.3 V		Transmit enable (error) port B
H1	ETH_B_RGMII_TX_CLK	I/O CMOS	1.8 V / 2.5 V / 3.3 V		transmit clock port B
J1	ETH_B_RGMII_RXDO	I CMOS	1.8 V / 2.5 V / 3.3 V		receive data bit 0 port B
K1	ETH_B_RGMII_RXD1	I CMOS	1.8 V / 2.5 V / 3.3 V		receive data bit 1 port B
M1	ETH_B_RGMII_RXD2	I CMOS	1.8 V / 2.5 V / 3.3 V		receive data bit 2 port B
N1	ETH_B_RGMII_RXD3	I CMOS	1.8 V / 2.5 V / 3.3 V		receive data bit 3 port B
K2	ETH_B_RGMII_RX_ER				n.c.
L1	ETH_B_RGMII_RX_DV(_ER)	I CMOS	1.8 V / 2.5 V / 3.3 V		receive data valid port B
P1	ETH_B_RGMII_RX_CLK	I/O CMOS	1.8 V / 2.5 V / 3.3 V		receive clock port B
M2	ETH_B_SDP				n.c.
C7	ETH_B_MDIO	I/O CMOS	1.8 V / 2.5 V / 3.3 V		ETH management bus data signal port B
C6	ETH_B_MDC	O CMOS	1.8 V / 2.5 V / 3.3 V		ETH management bus clock signal port B

Table 8: OSM size-S (Ethernet pins)

¹ Also used for ETH_B on some F&S modules.

2.2.8 GPIO

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
D17	GPIO_A_0	I/O CMOS	1.8 V		
E17	GPIO_A_1	I/O CMOS	1.8 V		
F17	GPIO_A_2	I/O CMOS	1.8 V		
G17	GPIO_A_3	I/O CMOS	1.8 V		
H17	GPIO_A_4	I/O CMOS	1.8 V		
J17	GPIO_A_5	I/O CMOS	1.8 V		
K17	GPIO_A_6	I/O CMOS	1.8 V		dual function: SPI_A_CS1#
L17	GPIO_A_7	I/O CMOS	1.8 V		dual function: SPI_B_CS1#
D19	GPIO_B_0	I/O CMOS	1.8 V		
E19	GPIO_B_1	I/O CMOS	1.8 V		
F19	GPIO_B_2	I/O CMOS	1.8 V		
G19	GPIO_B_3	I/O CMOS	1.8 V		
H19	GPIO_B_4	I/O CMOS	1.8 V		
J19	GPIO_B_5	I/O CMOS	1.8 V		
K19	GPIO_B_6	I/O CMOS	1.8 V		
L19	GPIO_B_7	I/O CMOS	1.8 V		
D3	GPIO_C_0	I/O CMOS	1.8 V		
D4	GPIO_C_1	I/O CMOS	1.8 V		
E3	GPIO_C_2	I/O CMOS	1.8 V		
E4	GPIO_C_3	I/O CMOS	1.8 V		
F3	GPIO_C_4	I/O CMOS	1.8 V		dual function: DISP_VDD_EN
F4	GPIO_C_5	I/O CMOS	1.8 V		dual function: DISP_BL_EN
G3	GPIO_C_6	I/O CMOS	1.8 V		dual function: CAM_A_PWR
G4	GPIO_C_7	I/O CMOS	1.8 V		dual function: CAM_A_RST#

Table 9: OSM size-S (GPIO pins)

2.2.9 SDIO

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
E20	SDIO_A_CMD ¹	I/O CMOS	1.8 V / 3.3 V		command/response port A
F21	SDIO_A_CLK	O CMOS	1.8 V / 3.3 V		clock port A
G20	SDIO_A_D0	I/O CMOS	1.8 V / 3.3 V		data bit 0 port A
G21	SDIO_A_D1	I/O CMOS	1.8 V / 3.3 V		data bit 1 port A
H20	SDIO_A_D2	I/O CMOS	1.8 V / 3.3 V		data bit 2 port A
H21	SDIO_A_D3	I/O CMOS	1.8 V / 3.3 V		data bit 3 port A
J21	SDIO_A_CD# ²	I OD CMOS	1.8 V / 3.3 V	PU 10k	card-detect port A
D20	SDIO_A_WP ³	I OD CMOS	1.8 V / 3.3 V	PU 10k	write-protect port A
D21	SDIO_A_PWR_EN ⁴	O CMOS	1.8 V / 3.3 V		power enable port A
K21	SDIO_B_CMD ¹	I/O CMOS	1.8 V / 3.3 V		command/response port B
K20	SDIO_B_CLK	O CMOS	1.8 V / 3.3 V		clock port B
L20	SDIO_B_D0	I/O CMOS	1.8 V / 3.3 V		data bit 0 port B
L21	SDIO_B_D1	I/O CMOS	1.8 V / 3.3 V		data bit 1 port B
M21	SDIO_B_D2	I/O CMOS	1.8 V / 3.3 V		data bit 2 port B
N20	SDIO_B_D3	I/O CMOS	1.8 V / 3.3 V		data bit 3 port B
N21	SDIO_B_D4	I/O CMOS	1.8 V / 3.3 V		data bit 4 port B

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
P20	SDIO_B_D5	I/O CMOS	1.8 V / 3.3 V		data bit 5 port B
P21	SDIO_B_D6	I/O CMOS	1.8 V / 3.3 V		data bit 6 port B
R21	SDIO_B_D7	I/O CMOS	1.8 V / 3.3 V		data bit 7 port B
T21	SDIO_B_CD# ²	I/O CMOS	1.8 V / 3.3 V	PU 10k	card-detect port B
U20	SDIO_B_WP ³	I/O CMOS	1.8 V / 3.3 V	PU 10k	write-protect port B
U21	SDIO_B_PWR_EN ⁴	O CMOS	1.8 V / 3.3 V		power enable port B

Table 10: OSM size-S (SDIO pins)

¹ The signal is used for card initialization and for command/response transfer. During the initialization, this signal acts as open drain. During the operation, the signal acts in push-pull mode.

² This signal indicates when a SD/MMC card is present.

³ This signal denotes the state of the write-protect tab on SD cards.

⁴ This signal enables the power supply for a SD/MMC card device.

2.2.10 PWM

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
E18	PWM_0	O CMOS	1.8 V		dual function: DISP_BL_PWM
F18	PWM_1	O CMOS	1.8 V		
G18	PWM_2	O CMOS	1.8 V		
H18	PWM_3	O CMOS	1.8 V		
J18	PWM_4	O CMOS	1.8 V		
K18	PWM_5	O CMOS	1.8 V		

Table 11: OSM size-S (PWM pins)

2.2.11 Analog Signals

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
M18	ADC_0	analog	0 ... 1.8 V		
N18	ADC_1	analog	0 ... 1.8 V		

Table 12: OSM size-S (ADC pins)

2.2.12 SPI

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
V15	SPI_A_SDO_(IO0)	I/O CMOS	1.8 V		data bit 0 port A
U15	SPI_A_SD1_(IO1)	I/O CMOS	1.8 V		data bit 1 port A
W16	SPI_A_WP_(IO2)	I/O CMOS	1.8 V		data bit 2 port A
W15	SPI_A_HOLD_(IO3)	I/O CMOS	1.8 V		data bit 3 port A
Y15	SPI_A_CS0#	O CMOS	1.8 V		master chip select 0 port A
K17	SPI_A_CS1#	O CMOS	1.8 V		master chip select 1 port A
U16	SPI_A_SCK	O CMOS	1.8 V		clock port A
Y22	SPI_B_SD1	I CMOS	1.8 V		serial data input port B
Y23	SPI_B_SDO	O CMOS	1.8 V		serial data output port B
AA23	SPI_B_CS0#	O CMOS	1.8 V		master chip select 0 port B
L17	SPI_B_CS1#	O CMOS	1.8 V		master chip select 1 port B
Y21	SPI_B_SCK	O CMOS	1.8 V		clock port B

Table 13: OSM size-S (SPI pins)

2.2.13 I2S

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
V21	I2S_A_DATA_IN	I CMOS	1.8 V		audio data input port A
W21	I2S_A_DATA_OUT	O CMOS	1.8 V		audio data output port A
W18	I2S_A_LRCLK ¹	I/O CMOS	1.8 V		left & right synchronization clock port A
W20	I2S_A_BITCLK ¹	I/O CMOS	1.8 V		audio clock port A
V19	I2S_B_DATA_IN	I CMOS	1.8 V		audio data input port B
W19	I2S_B_DATA_OUT	O CMOS	1.8 V		audio data output port A
T18	I2S_B_LRCLK ¹	I/O CMOS	1.8 V		left & right synchronization clock port B
T19	I2S_B_BITCLK ¹	I/O CMOS	1.8 V		audio clock port B
V18	I2S_MCLK	O CMOS	1.8 V		master clock output to I2S codec(s)

Table 14: OSM size-S (I2S pins)

¹ Output, if module acts in Master Mode. Input, if module acts in Slave Mode.

2.2.14 CAN

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
AC17	CAN_A_TX	O CMOS	1.8 V		transmit output port A
AB17	CAN_A_RX	I CMOS	1.8 V		receive input port A
AC19	CAN_B_TX	O CMOS	1.8 V		transmit output port B
AB19	CAN_B_RX	I CMOS	1.8 V		receive input port B

Table 15: OSM size-S (CAN pins)

2.2.15 USB

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
AB13	USB_A_D_N	I/O USB	USB		USB differential data (negative) port A
AC14	USB_A_D_P	I/O USB	USB		USB differential data (positive) port A
AB14	USB_A_ID	I OD CMOS	1.8 V	PU 10k	input to announce an USB 2.0 OTG device on port A
AC15	USB_A_OC#	I OD CMOS	1.8 V	PU 10k	over-current detection port A
AB16	USB_A_VBUS	I USB VBUS	5.0 V		USB VBUS detection port A
AC16	USB_A_EN	O CMOS	1.8 V		power enable for USB VBUS port B
AB23	USB_B_D_N	I/O USB	USB		USB differential data (negative) port B
AC22	USB_B_D_P	I/O USB	USB		USB differential data (positive) port B
AB22	USB_B_ID	I OD CMOS	1.8 V		input to announce an USB 2.0 OTG device on port B
AC21	USB_B_OC#	I OD CMOS	1.8 V		over-current detection port B
AB20	USB_B_VBUS	I USB VBUS	5.0 V		USB VBUS detection port B
AC20	USB_B_EN	O CMOS	1.8 V		power enable for USB VBUS port B
D11	USB_C_D_N	I/O USB	USB		USB differential data (negative) port C
D10	USB_C_D_P	I/O USB	USB		USB differential data (positive) port C
D9	USB_C_ID	I OD CMOS	1.8 V		input to announce an USB 2.0 OTG device on port C
C8	USB_C_OC#	I OD CMOS	1.8 V		over-current detection port C
C9	USB_C_VBUS	I USB VBUS	5.0 V		USB VBUS detection port C
C10	USB_C_EN	O CMOS	1.8 V		power enable for USB VBUS port C
A9	USB_C_SSTX_N ¹	O USB SS	USB SS		SuperSpeed transmit data (negative) port C
A8	USB_C_SSTX_P ¹	O USB SS	USB SS		SuperSpeed transmit data (positive) port C



Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
B11	USB_C_SS_RX_N ¹	I USB SS	USB SS		SuperSpeed receive data (negative) port C
B10	USB_C_SS_RX_P ¹	I USB SS	USB SS		SuperSpeed receive data (positive) port C

Table 16: OSM size-S (USB pins)

¹ AC coupled on carrier.

2.2.16 I2C

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
AA15	I2C_A_SCL	I/O OD CMOS	1.8 V	PU 2k2	clock signal port A
AA16	I2C_A_SDA	I/O OD CMOS	1.8 V	PU 2k2	data signal port A
AA20	I2C_B_SCL	I/O OD CMOS	1.8 V	PU 2k2	clock signal port B
AA21	I2C_B_SDA	I/O OD CMOS	1.8 V	PU 2k2	data signal port B

Table 17: OSM size-S (I2C pins)

2.2.17 PCIe

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
AB1	PCIe_A_HSI0_P ¹	I PCIe	PCIe		receive data (positive)
AB2	PCIe_A_HSI0_N ¹	I PCIe	PCIe		receive data (negative)
AC2	PCIe_A_HSO0_P ¹	O PCIe	PCIe		transmit data (positive)
AC3	PCIe_A_HSO0_N ¹	O PCIe	PCIe		transmit data (negative)
W2	PCIe_CLKREQ#	I OD CMOS	1.8 V	PU 10k	request reference clock
V2	PCIe_A_PERST#	O CMOS	1.8 V		port reset
W1	PCIe_REFCLK_P	O PCIe	PCIe		reference clock (positive)
Y1	PCIe_REFCLK_N	O PCIe	PCIe		reference clock (negative)
T2	PCIe_WAKE#	I OD CMOS	1.8 V	PU 10k	wake up interrupt to host
U1	PCIe_SMDAT	I/O OD CMOS	1.8 V	PU 2k2	system management bus I2C data
T1	PCIe_SMCLK	O OD CMOS	1.8 V	PU 2k2	system management bus I2C clock
R2	PCIe_SM_ALERT#	I OD CMOS	1.8 V	PU 2k2	system management bus interrupt signal

Table 18: OSM size-S (PCIe pins)

¹ AC coupled on carrier.

2.2.18 MIPI CSI

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
C1	CSI_A_DATA0_N	I MIPI CSI			data 0 (negative)
B1	CSI_A_DATA0_P	I MIPI CSI			data 0 (positive)
A2	CSI_A_DATA1_N	I MIPI CSI			data 1 (negative)
A3	CSI_A_DATA1_P	I MIPI CSI			data 1 (positive)
A5	CSI_A_DATA2_N	I MIPI CSI			data 2 (negative)
A6	CSI_A_DATA2_P	I MIPI CSI			data 2 (positive)
B6	CSI_A_DATA3_N	I MIPI CSI			data 3 (negative)
B7	CSI_A_DATA3_P	I MIPI CSI			data 3 (positive)
B3	CSI_A_CLOCK_N	I MIPI CSI			clock (negative)
B4	CSI_A_CLOCK_P	I MIPI CSI			clock (positive)
C2	CAM_MCK	O CMOS	1.8 V		master clock
C3	CAM_A_SDA CSI_A_TX_N	I/O OD CMOS O MIPI CSI	1.8 V	PU 2k2	camera data support link I2C data (CSI 2.0) transmit data (negative) (CSI 3.0)

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
C4	CAM_A_SCL CSI_A_TX_P	I/O OD CMOS O MIPI CSI	1.8 V	PU 2k2	camera data support link I2C clock (CSI 2.0) transmit data (positive) (CSI 3.0)
G3	CAM_A_PWR	O CMOS	1.8 V		camera power enable dual function: GPIO_C_6
G4	CAM_A_RST#	O CMOS	1.8 V		camera reset dual function: GPIO_C_7

Table 19: OSM size-S (MIPI CSI pins)

2.2.19 Display

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
AB11	DSI_DATA0_N LVDS_A_LANE0_N	O MIPI DSI O LVDS			data 0 (negative)
AB10	DSI_DATA0_P LVDS_A_LANE0_P	O MIPI DSI O LVDS			data 0 (positive)
AC9	DSI_DATA1_N LVDS_A_LANE1_N	O MIPI DSI O LVDS			data 1 (negative)
AC8	DSI_DATA1_P LVDS_A_LANE1_P	O MIPI DSI O LVDS			data 1 (positive)
AC6	DSI_DATA2_N LVDS_A_LANE2_N	O MIPI DSI O LVDS			data 2 (negative)
AC5	DSI_DATA2_P LVDS_A_LANE2_P	O MIPI DSI O LVDS			data 2 (positive)
AB5	DSI_DATA3_N LVDS_A_LANE3_N	O MIPI DSI O LVDS			data 3 (negative)
AB4	DSI_DATA3_P LVDS_A_LANE3_P	O MIPI DSI O LVDS			data 3 (positive)
AB8	DSI_CLOCK_N LVDS_A_CLK_N	O MIPI DSI O LVDS			clock (negative)
AB7	DSI_CLOCK_P LVDS_A_CLK_P	O MIPI DSI O LVDS			clock (positive)
AA3	DSI_TE	I CMOS	1.8 V		DSI panel tearing effect signal, LVDS: n.u.
F3	DISP_VDD_EN	O CMOS	1.8 V		primary display power enable dual function: GPIO_C_4
F4	DISP_BL_EN	O CMOS	1.8 V		primary display backlight enable dual function: GPIO_C_5
E18	DISP_BL_PWM	O CMOS	1.8 V		primary display brightness control dual function: PWM_0
Y7	RGB_R0	O CMOS	3.3 V		red data bit 0
AA6	RGB_R1	O CMOS	3.3 V		red data bit 1
Y6	RGB_R2	O CMOS	3.3 V		red data bit 2
AA5	RGB_R3	O CMOS	3.3 V		red data bit 3
Y5	RGB_R4	O CMOS	3.3 V		red data bit 4
Y4	RGB_R5	O CMOS	3.3 V		red data bit 5
W4	RGB_G0	O CMOS	3.3 V		green data bit 0
V3	RGB_G1	O CMOS	3.3 V		green data bit 1
V4	RGB_G2	O CMOS	3.3 V		green data bit 2
U3	RGB_G3	O CMOS	3.3 V		green data bit 3

Contact #	Contact Name	I/O Type	I/O Level	PU / PD	Comments
T3	RGB_G4	O CMOS	3.3 V		green data bit 4
T4	RGB_G5	O CMOS	3.3 V		green data bit 5
R4	RGB_B0	O CMOS	3.3 V		blue data bit 0
R3	RGB_B1	O CMOS	3.3 V		blue data bit 1
P3	RGB_B2	O CMOS	3.3 V		blue data bit 2
N3	RGB_B3	O CMOS	3.3 V		blue data bit 3
N4	RGB_B4	O CMOS	3.3 V		blue data bit 4
M3	RGB_B5	O CMOS	3.3 V		blue data bit 5
M4	RGB_(PIXEL)CLK	O CMOS	3.3 V		pixel clock
L3	RGB_VSYNC	O CMOS	3.3 V		vertical SYNC
K3	RGB_HSYNC	O CMOS	3.3 V		horizontal SYNC
K4	RGB_DISP	O CMOS	3.3 V		display ON/OFF
J4	RGB_DE	O CMOS	3.3 V		data enable
J3	RGB_RESET#	O CMOS	3.3 V		global reset
H3	RGB_CS#	O CMOS	3.3 V		chip select

Table 20: OSM size-S (DISP pins)

3 Handling

3.1 Packaging

The OSM modules are shipped in trays. One tray can hold 24 modules. An empty tray is used as top cover.

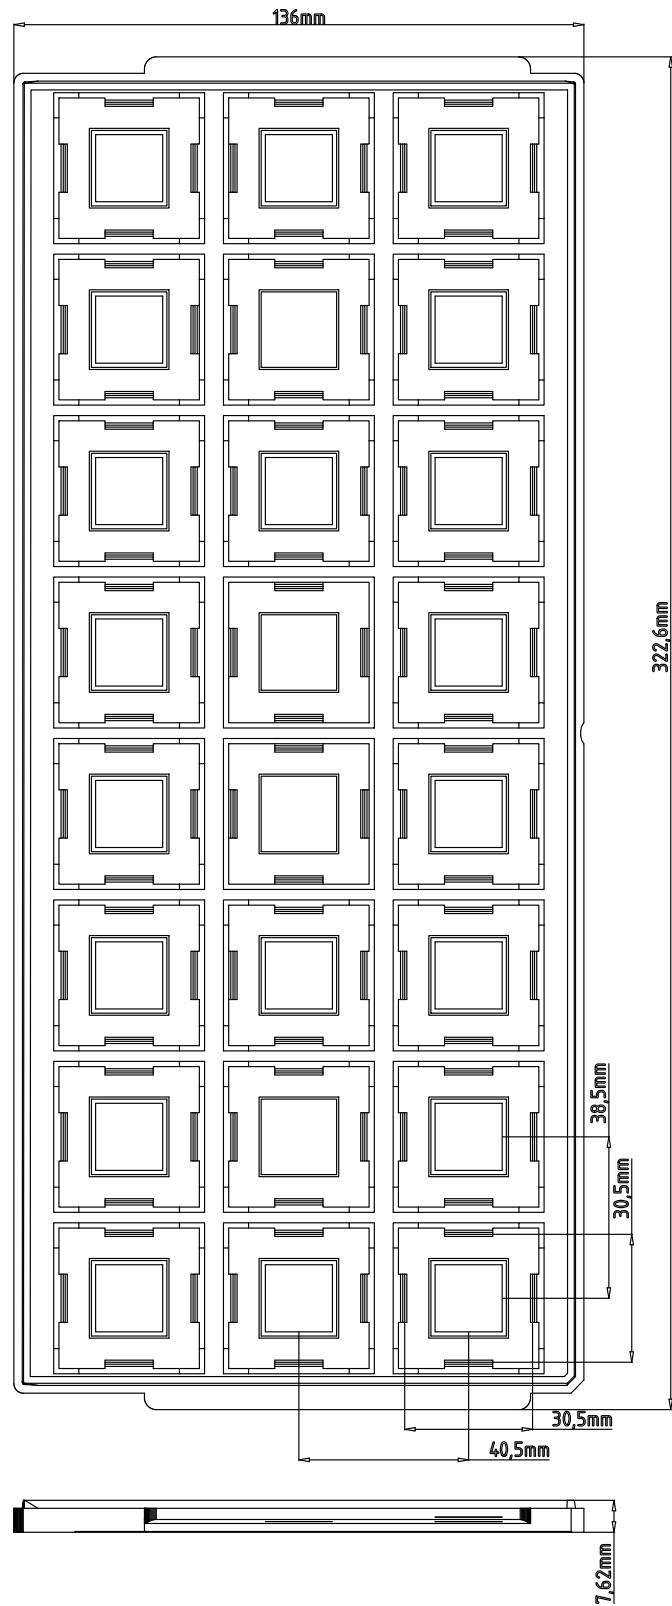


Figure 4: Shipping Tray

Please note that the trays are on loan only and must be returned to F&S after use.

3.2 Identification

3.2.1 Matrix Code Sticker

All F&S hardware is shipped with a matrix code sticker which includes the serial number. Enter your serial number here: <https://www.fs-net.de/en/support/serial-number-info-and-rma/> to get information on shipping date and type of board.



Figure 5: Matrix Code Sticker (example)

3.2.2 PCB Information

Due to the lack of space, the pcb information

- name & revision (etch)
- UL marking, batch & date code (soldermask)

are only available in a readable format on the BOT side of the pcb. The following picture shows the marking positions.

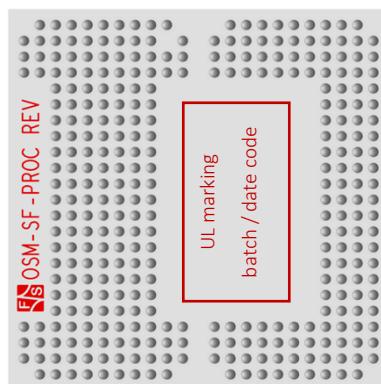


Figure 6: F&S OSM Size-S (pcb information, BOT view)

3.3 Production

3.3.1 Orientation Mark for Placement

For an optical inspection of the correct orientation of the module during the placement on the carrier one can use the F&S-logo on TOP side as an orientation mark. The following picture shows the position of the logo in relation to the contact grid, which is the same for all F&S OSM modules (size-S).


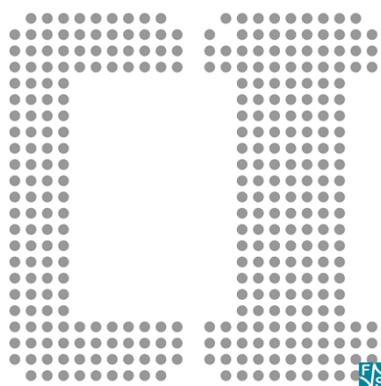


Figure 7: F&S OSM Size-S (F&S logo as orientation mark, TOP view through the board)

3.3.2 Soldering Profile

As the exact soldering profile depends on many factors, the following information are to understand as an initial reference¹. Preconditions:

- Dry OSM module (MSL 3).
- Only 2 soldering cycles are permitted in total.

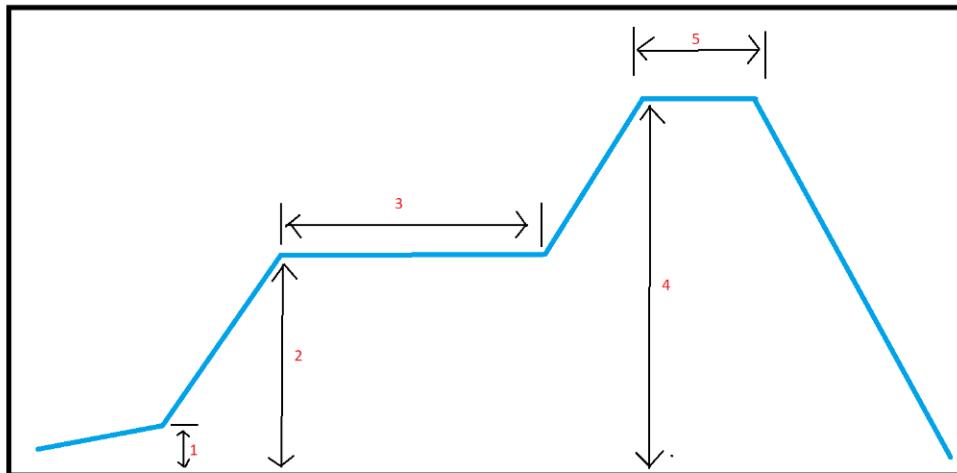

	min	typ	max
1 SYNC for temperature-equalization (if required)			80 °C ²
2 Preheat (Temperature)		160 °C	190 °C
3 Preheat (Time)		≤ 60 s	90 s
4 Soldering (Temperature)	225 °C ³		240 °C
5 Soldering (Time @ 240 °C)		15 s	30 s

Figure 8: Soldering Profile (Vapor phase, example)

¹ The profile is only valid for Vapor Phase-Soldering. Reflow may require higher temperatures. **260 °C must not be exceeded.**

² The total time above 60 °C must not exceed 600 s.

³ FTGA

4 Appendix

4.1 Second source rules

The qualifications of products from a second source are done autonomously by F&S. This is necessary to guarantee delivery times and product life. A setup of release samples with released second sources is not possible. F&S does not use broker components without the consent of the customer.

4.2 RoHS and REACH statement

Please see the following webpage: <https://www.fs-net.de/en/support/certifications/>

4.3 Important Notice

The information in this publication has been carefully checked and is believed to be entirely accurate at the time of publication. F&S Elektronik Systeme (“F&S”) assumes no responsibility, however, for possible errors or omissions, or for any consequences resulting from the use of the information contained in this documentation.

F&S reserves the right to make changes in its products or product specifications or product documentation with the intent to improve function or design at any time and without notice and is not required to update this documentation to reflect such changes.

F&S makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does F&S assume any liability arising out of the documentation or use of any product and specifically disclaims any and all liability, including without limitation any consequential or incidental damages.

Specific testing of all parameters of each device is not necessarily performed unless required by law or regulation.

Products are not designed, intended, or authorized for use as components in systems intended for applications intended to support or sustain life, or for any other application in which the failure of the product from F&S could create a situation where personal injury or death may occur. Should the Buyer purchase or use a F&S product for any such unintended or unauthorized application, the Buyer shall indemnify and hold F&S and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, expenses, and reasonable attorney fees arising out of, either directly or indirectly, any claim of personal injury or death that may be associated with such unintended or unauthorized use, even if such claim alleges that F&S was negligent regarding the design or manufacture of said product.

Specifications are subject to change without notice.



5 Warranty Terms

5.1 Hardware Warranties

F&S guarantees hardware products against defects in workmanship and material for a period of one (1) year from the date of shipment. Your sole remedy and F&S's sole liability shall be for F&S, at its sole discretion, to either repair or replace the defective hardware product at no charge or to refund the purchase price. Shipment costs in both directions are the responsibility of the customer. This warranty is void if the hardware product has been altered or damaged by accident, misuse or abuse.

5.2 Software Warranties

Software is provided "AS IS". F&S makes no warranties, either express or implied, with regard to the software object code or software source code either or with respect to any third party materials or intellectual property obtained from third parties. F&S makes no warranty that the software is useable or fit for any particular purpose. This warranty replaces all other warranties written or unwritten. F&S expressly disclaims any such warranties. In no case shall F&S be liable for any consequential damages.

5.3 Disclaimer of Warranty

THIS WARRANTY IS MADE IN PLACE OF ANY OTHER WARRANTY, WHETHER EXPRESSED, OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A SPECIFIC PURPOSE, NON-INFRINGEMENT OR THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION, EXCEPT THE WARRANTY EXPRESSLY STATED HEREIN. THE REMEDIES SET FORTH HEREIN SHALL BE THE SOLE AND EXCLUSIVE REMEDIES OF ANY PURCHASER WITH RESPECT TO ANY DEFECTIVE PRODUCT.

5.4 Limitation on Liability

UNDER NO CIRCUMSTANCES SHALL F&S BE LIABLE FOR ANY LOSS, DAMAGE OR EXPENSE SUFFERED OR INCURRED WITH RESPECT TO ANY DEFECTIVE PRODUCT. IN NO EVENT SHALL F&S BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES THAT YOU MAY SUFFER DIRECTLY OR INDIRECTLY FROM USE OF ANY PRODUCT. BY ORDERING THE PRODUCT, THE CUSTOMER APPROVES THAT THE F&S PRODUCT, HARDWARE AND SOFTWARE, WAS THOROUGHLY TESTED AND HAS MET THE CUSTOMER'S REQUIREMENTS AND SPECIFICATIONS

