


Hardware Documentation

LCD.7.LVDS.1

*7"LVDS Display (1024 x 600 px)
with capacitive touch sensor*

for HW Revision 1.20

Version 006/11.2025



**Elektronik
Systeme**

© F&S Elektronik Systeme GmbH
Untere Waldplätze 23
D-70569 Stuttgart

www.fs-net.de

Phone: +49(0)711-123722-0

About This Document

This document describes how to use the LCD.7-LVDS.1 (further named as display) with mechanical and electrical information. The latest version of this document can be found at: www.fs-net.de.

ESD Requirements



All F&S hardware products are electrostatic discharge (ESD) sensitive. All products are handled and packaged according to ESD guidelines. Please do not handle or store ESD sensitive material in ESD unsafe environments. Negligent handling will harm the product and warranty claims become void.

Review Service

F&S provide a schematic review service for your baseboard implementation. Please send your schematic as searchable PDF to support@fs-net.de.

History

Version/Date	Platform	Added (A) Removed (R) Modified (M)	Chapter	Description	Author
001/02.2024	All			Initial Version	SM
002/02.2024	All	M, A	1	Change title. Added resolution, active area, luminance and cover material	SM
003/04.2024	All	A, M	Title, 1	New title, add information	SM
004/02.2025	All	A, M	All	New template, changes for new revision	SM
005/02.2025	All	M	4.1	Change link	SM
006/11.2025	All	M	1.2	Change reference designator for backlight to J5	SM

Table of Content

1	Overview	5
1.1	General Parameter	5
1.2	Dimensions and Connectors	6
1.2.1	Technical Drawing	6
1.2.2	Connectors	6
2	Detailed Description	7
2.1	LVDS & I ² C In Connector J2	7
2.2	Backlight Supply Connector J5	7
2.3	Touch Controller	8
2.4	Control Signals	8
2.5	Display Configurations	8
2.6	VCOM	9
2.7	Software	9
3	Characteristics	10
3.1	Absolute Maximum Ratings	10
3.2	Recommended Operating Conditions	10
4	Packaging & Labels	11
4.1	ESD	11
4.2	Serial Number	11
5	Appendix	12
5.1	Second source rules	12
5.2	RoHS and REACH statement	12
5.3	Important Notice.....	12
6	Warranty Terms	13
6.1	Hardware Warranties	13
6.2	Software Warranties	13
6.3	Disclaimer of Warranty	13
6.4	Limitation on Liability.....	13

Tables

Table 1: General parameter.....	5
Table 2: Connector description	6
Table 3: J2 pin description	7
Table 4: J5 pin description	7
Table 5: Pin description I ² C I/O expander.....	8
Table 6: J2 pin description	9
Table 7: Absolute maximum ratings	10
Table 8: Recommended operating conditions	10

Figures

Figure 1: Back view, all dimensions in mm	6
Figure 2: Top view, all dimensions in mm	6
Figure 3: Config resistors positions.....	8

1 Overview

The LCD.7.LVDS.1 is a LCD display with capacitive touch sensor including an adapter for the display and backlight voltages and an I2C IO expander for control signals.

The latest versions of the documents can be found on www.fs-net.de.

1.1 General Parameter

Parameter	Description
Dimension	165.0 mm x 100.0 mm x 7.5 mm (13.1 mm with Electronic)
Weight	≈ 215 g
Operating Temperature	-25.0 °C ... +70.0 °C
Resolution	1024 x 600 Pixel (RGB)
Active Area	154.2 x 85.9 mm
Surface Luminance	450 – 500 cd/m ²
Cover Materiel	Glass
Touch points	5

Table 1: General parameter

1.2 Dimensions and Connectors

1.2.1 Technical Drawing

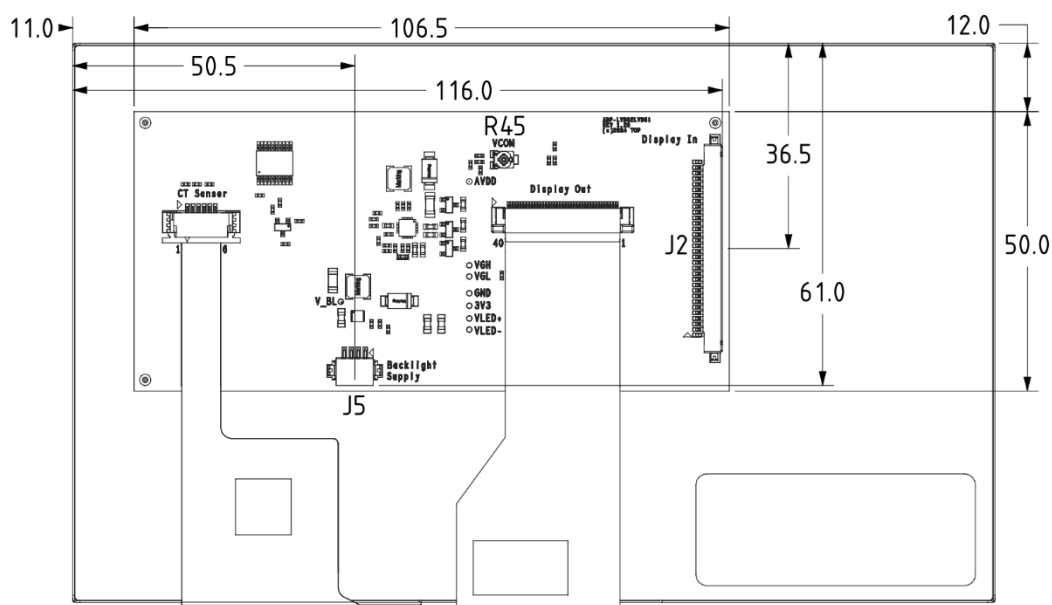


Figure 1: Back view, all dimensions in mm

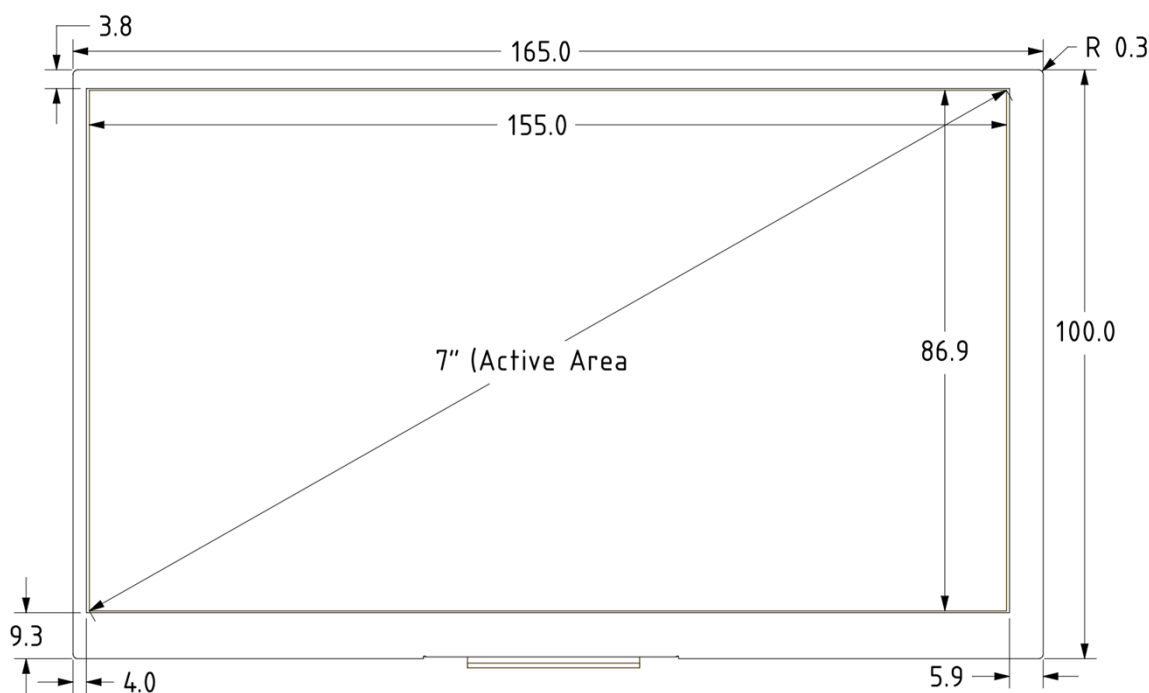


Figure 2: Top view, all dimensions in mm

1.2.2 Connectors

Ref.	Description	Connector Type	Counter Part
J2	LVDS & I2C In	Hirose, MDF76GW-30S-1H	JAE, FI-X30H ¹
J5	Backlight Connector	Hirose, DF13-04	Hirose, DF13-4S-1.25C ¹

¹Connectors and preassembled cables are available for purchase at www.fs-net.de.

Table 2: Connector description

2 Detailed Description

2.1 LVDS & I²C In Connector J2

Pin	Signal Name	Voltage	Description
1	DATA0 -		LVDS Data 0
2	DATA0 +		
3	DATA1 -		LVDS Data 1
4	DATA1 +		
5	DATA2 -		LVDS Data 2
6	DATA2 +		
7	GND		
8	CLK		LVDS Clock
9	CLK		
10	DATA3 -		LVDS Data 3
11	DATA3 +		
12	n.c.		
13	n.c.		
14	GND		
15	n.c.		
16	n.c.		
17	GND		
18	n.c.		
19	n.c.		
20	n.c.		
21	n.c.		
22	n.c.		
23	n.c.		
24	GND		
25	I ² C SDA	3.3 V	I ² C for touch and control signals
26	Touch IRQ	3.3 V	Interrupt output for touch events, active low
27	I ² C SCL	3.3 V	I ² C for touch and control signals
28	DISPLAY RESET	3.3 V	Optional external input for display reset
29	V _{IN}	3.3 V	Power supply
30			

Table 3: J2 pin description

2.2 Backlight Supply Connector J5

Pin	Signal Name	Voltage	Description
1	V _{BL}	5.0 V	Backlight supply input
2			
3	GND		
4			

Table 4: J5 pin description

2.3 Touch Controller

The display uses an Ilitek ILI2130 touch controller. The controller is reachable over the I²C interface at J2. The I²C address is 0x41.

2.4 Control Signals

An I²C I/O expander is used to generate control signals for display, touch sensor and backlight. The used expander is a NXP PCA9634PW. The I²C Address of the expander is 0x61. All pins must be configured as open drain. The PWM signal for the backlight brightness uses the group duty cycle register 0x0A of the chip, because of the lower frequency. Please see the datasheet of the chip for further information.

Pin	Signal Name	Description
6	BL ON	Turns the backlight on and off
7	BL PWM	Controls backlight brightness
9	DISPLAY RESET	Default reset signal for the display
12	TOUCH RESET	Reset signal for the touch sensor
14	Reserved	Do not use

Table 5: Pin description I²C I/O expander

2.5 Display Configurations

The display can be configured with pull up and down resistors. The resistors are placed below the display FPC connector.

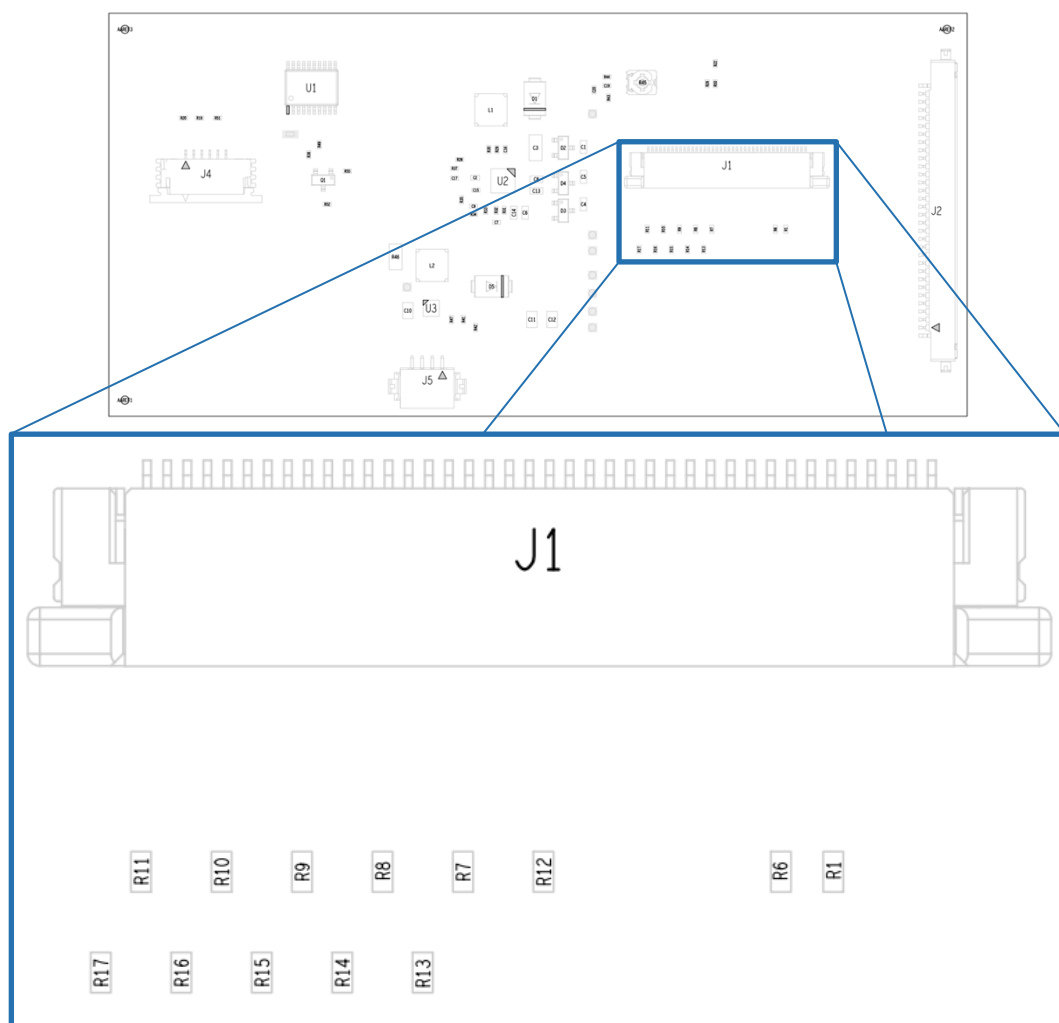


Figure 3: Config resistors positions

Pin	Signal Name	Level	Description
R1	Standby Mode	HIGH	Normal operation
R6		LOW	Timing controller source driver will turn off, all outputs are HIGH-Z
R7	SELB	HIGH	6bit Mode
R13		LOW	8bit Mode
R8	Left/Right	HIGH	Left to right scan direction
R14		LOW	Right to left scan direction
R9	Up/Down	HIGH	Bottom to top scan direction
R15		LOW	Top to Bottom scan direction
R10	CABC_EN[1]	HIGH	CABC_EN = 00, CABC off (default)
R16		LOW	
R11	CABC_EN[0]	HIGH	CABC_EN = 10, still picture
R17		LOW	CABC_EN = 11, moving image

Table 6: J2 pin description

2.6 VCOM

R45 is used to set the VCOM voltage (Pixel reference voltage). It can be adjusted from 2,8V to 3,5V.

2.7 Software

Drivers for the F&S boards with an LVDS Interface are provided.

3 Characteristics

3.1 Absolute Maximum Ratings

Description	Min	Max	Unit
Power Input			
Supply voltage display input	-0.30	5.00	V
Supply voltage backlight	0.00	10.20	V

Table 7: Absolute maximum ratings

3.2 Recommended Operating Conditions

Parameter	Description	Condition	Min	Typ	Max	Unit
Display						
V _{IN}	Input voltage for the display at J2		3.00	3.30	3.60	V
P _{IN}	Power consumption Display, Touch & I ² C IO Expander at 3,3V			0.65		W
Backlight						
V _{BL-IN}	Input voltage for the Backlight at J5		3.30 ¹	5.0 ¹	10.20	V
P _{BL-IN}	Power consumption Backlight at 5V and PWM frequency at:	20% 50% 100%		0.35 0.90 1.80		W
I _F	Forward current backlight LED			0.2		A
V _F	Forward voltage backlight LED		8.1		10.2	V
t _{DUR}	Durability until 50% of initial brightness			50000.0 ²		h
I²C						
V _{I2C LOW}	I ² C SDA/SCL LOW-level input voltage		-0.50		+0.30V _{IN}	V
V _{I2C HIGH}	I ² C SDA/SCL HIGH-level input voltage		0.70V _{IN}	3.30	5.50	V
Storage						
T _{STORE}	Storage time	room temperature, no humidity control		6	months	
		t _{amb} = 25°C ± 5°C humidity max. 60%		12 ³	months	

¹ Optional the backlight can be supplied by the LVDS & I²C In connector with a voltage of 3,3V and a max current of 100mA. For this option hardware modifications are needed

² If the backlight is driven under high current, high ambient temperature and humidity conditions, the lifetime will be reduced.

³ For longer storage time, vacuum dry packs are recommended

Table 8: Recommended operating conditions

4 Packaging & Labels

4.1 ESD

All F&S electrostatic discharge sensitive (ESDS) products are marked and will be shipped in ESD protective packaging.

4.2 Serial Number

All shipped F&S products are labeled with a matrix code sticker that includes the serial number. For product information visit www.fs-net.de/en/support/serial-number-info-and-rma/.

5 Appendix

5.1 Second source rules

The qualifications of products from a second source are done autonomously by F&S. This is necessary to guarantee delivery times and product life. A setup of release samples with released second sources is not possible. F&S does not use broker components without the consent of the customer.

5.2 RoHS and REACH statement

Please see the following webpage: <https://www.fs-net.de/en/support/certifications/>

5.3 Important Notice

The information in this publication has been carefully checked and is believed to be entirely accurate at the time of publication. F&S Elektronik Systeme ("F&S") assumes no responsibility, however, for possible errors or omissions, or for any consequences resulting from the use of the information contained in this documentation.

F&S reserves the right to make changes in its products or product specifications or product documentation with the intent to improve function or design at any time and without notice and is not required to update this documentation to reflect such changes.

F&S makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does F&S assume any liability arising out of the documentation or use of any product and specifically disclaims any and all liability, including without limitation any consequential or incidental damages.

Specific testing of all parameters of each device is not necessarily performed unless required by law or regulation.

Products are not designed, intended, or authorized for use as components in systems intended for applications intended to support or sustain life, or for any other application in which the failure of the product from F&S could create a situation where personal injury or death may occur. Should the Buyer purchase or use a F&S product for any such unintended or unauthorized application, the Buyer shall indemnify and hold F&S and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, expenses, and reasonable attorney fees arising out of, either directly or indirectly, any claim of personal injury or death that may be associated with such unintended or unauthorized use, even if such claim alleges that F&S was negligent regarding the design or manufacture of said product.

Specifications are subject to change without notice.

6 Warranty Terms

6.1 Hardware Warranties

F&S guarantees hardware products against defects in workmanship and material for a period of one (1) year from the date of shipment. Your sole remedy and F&S's sole liability shall be for F&S, at its sole discretion, to either repair or replace the defective hardware product at no charge or to refund the purchase price. Shipment costs in both directions are the responsibility of the customer. This warranty is void if the hardware product has been altered or damaged by accident, misuse or abuse.

6.2 Software Warranties

Software is provided "AS IS". F&S makes no warranties, either express or implied, with regard to the software object code or software source code either or with respect to any third party materials or intellectual property obtained from third parties. F&S makes no warranty that the software is useable or fit for any particular purpose. This warranty replaces all other warranties written or unwritten. F&S expressly disclaims any such warranties. In no case shall F&S be liable for any consequential damages.

6.3 Disclaimer of Warranty

THIS WARRANTY IS MADE IN PLACE OF ANY OTHER WARRANTY, WHETHER EXPRESSED, OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A SPECIFIC PURPOSE, NON-INFRINGEMENT OR THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION, EXCEPT THE WARRANTY EXPRESSLY STATED HEREIN. THE REMEDIES SET FORTH HEREIN SHALL BE THE SOLE AND EXCLUSIVE REMEDIES OF ANY PURCHASER WITH RESPECT TO ANY DEFECTIVE PRODUCT.

6.4 Limitation on Liability

UNDER NO CIRCUMSTANCES SHALL F&S BE LIABLE FOR ANY LOSS, DAMAGE OR EXPENSE SUFFERED OR INCURRED WITH RESPECT TO ANY DEFECTIVE PRODUCT. IN NO EVENT SHALL F&S BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES THAT YOU MAY SUFFER DIRECTLY OR INDIRECTLY FROM USE OF ANY PRODUCT. BY ORDERING THE PRODUCT, THE CUSTOMER APPROVES THAT THE F&S PRODUCT, HARDWARE AND SOFTWARE, WAS THOROUGHLY TESTED AND HAS MET THE CUSTOMER'S REQUIREMENTS AND SPECIFICATIONS