SPECIFICATIONS

MXM Socket

AS0B3 Series
SMT Type
0.50mm [.020"] Pitch
230 Pos.

Mechanical
Contact Retention Force: *0.10kg min.*
Durability : *25 Cycles*

Electrical
Voltage Rating: *50V*
Current Rating: *0.5A*
Contact Resistance: *40mΩ max.*
Dielectric Withstanding Voltage: *500V AC/1 min.*
Insulation Resistance: *250MΩ*

Physical
Housing: *Thermoplastic, UL 94V-0 rated in Ivory Color*
Contact: *Copper alloy*
Plating: *See "ORDERING INFORMATION"*
Metal Tab: *Copper alloy*
Operating Temperature: *-40℃ to +85℃*

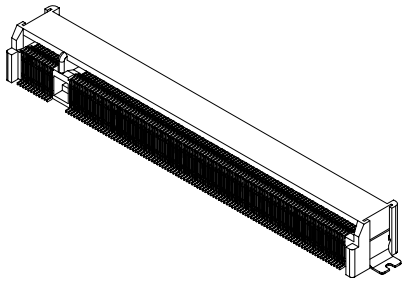

DRAWING

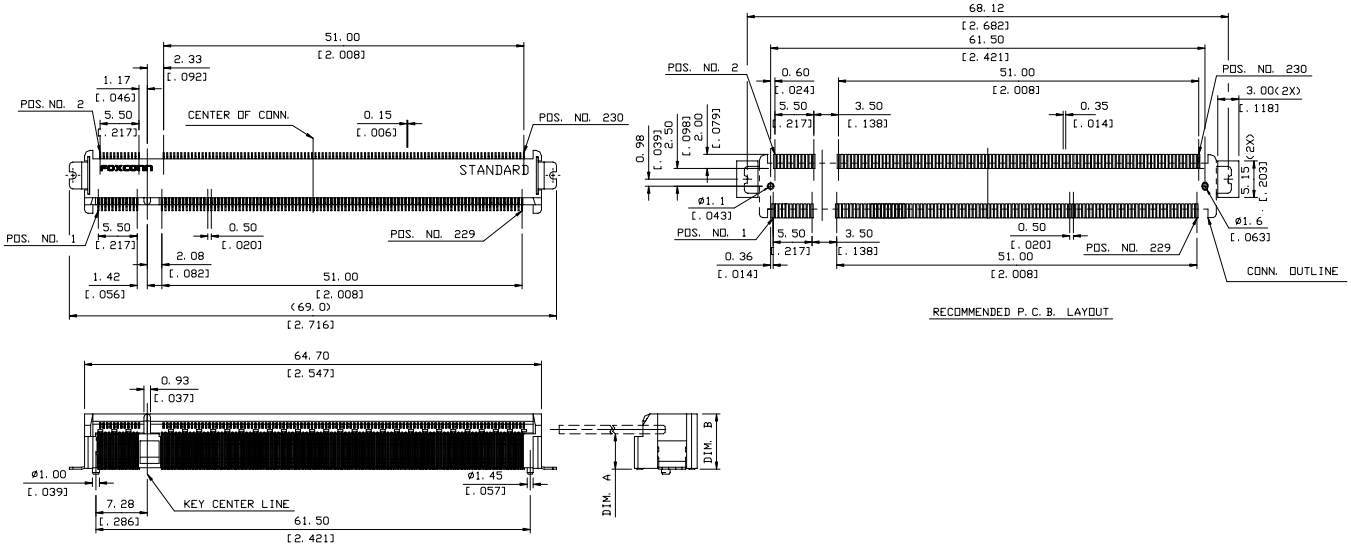

ORDERING INFORMATION

PRODUCT NO: AS0B326-S**N-7F

- Single Row
- Position No.
  B3=230Pos.
- SMT Tpye
- Contact Plating
  6=10u" min. Glod
- Standard Type
- Height
  78= 7.8mm Height
  55= 5.5mm Height
  43= 4.3mm Height
- Package
  7=Tape & Reel
- Lead Free

P/N	DIM.A	DIM.B
AS0B326-S78N-7F	5.0 [.197]	7.8 [.307]
AS0B326-S55N-7F	2.7 [.106]	5.5 [.217]
AS0B326-S43N-7F	1.5 [.059]	4.3 [.169]

All specification & dimensions are subject to change, please call your nearest Foxconn sales representative for update information.